

HINO

300 Series

Tipper Range



*Image may contain items not standard to the model

KEY FEATURES

Factory Tipper bodies with drop sides
 STD Cab, Wide & Crew Cab variants
 Pre-Collision System (PCS) including AEB & PD
 Vehicle Stability Control (VSC) including ABS & TC
 Lane Departure Warning System (LDWS)
 Daytime Running Lamps (DRL)
 Dual SRS Airbags
 Reverse Camera
 ECE R-29 Cab Strength Certified
 Cruise Control
 ADR 80/03 Emission level using Euro 5 Standard




KEY SPECIFICATIONS

GVM. 4,495 to 8,500 kg
GCM. GVM + 3,500kg
 Automatic up to 8,000kg
Power range 150hp to 165hp
Torque range 420Nm to 464Nm
Transmissions. . STD cab . . 5 spd Manual & 6 spd Automatic
 Wide cab . . 6 spd Manual & 6 spd Automatic
Wheelbases.2.5m to 4.2m*
Internal body length3.0m to 4.0m*

*See Model details for exact dimensions



MODEL DETAILS

Model Description		616 AT 2525 STD TIP PRO	616 AT 2525 STD TIPPER	616 MT 2525 STD TIPPER	616 AT 2810 WIDE TIP PRO	616 AT 2810 WIDE TIPPER	617 MT 2810 WIDE TIPPER
Product Code		XZU605R-WKTMSQ3 TP	XZU605R-WKTMSQ3 T	XZU605R-WKMMSQ3 T	XZU700R-WKTMSQ3 TP	XZU700R-WKTMSQ3 T	XZU700R-WKMMSQ3 T
TIPPER BODY							
Cubic Capacity		1.9m³			2.1m³		
Internal length (mm)		3,000			3,100		
Internal width (mm)		1,750			1,900		
Drop sides & tailgate height (mm)		370			370		
Deck plate thickness (mm)		3.2			3.2		
Front plate thickness (mm)		3.2			3.2		
Drop sides thickness (mm)		2.3			2.3		
Tailgate thickness (mm)		3.2	2.3		3.2	2.3	
Tipping angle (deg)		60°			60°		
Hydraulic cylinder bore & stroke (mm)		100 x 350			100 x 350		
Hydraulic pump model		VC02-04		VC02-03	VC02-06		
Control		Lever in the cab					
Body Lock		Equipped	N/A		Equipped	N/A	
Rear Gate type		Barn door	Single Gate		Barn door	Single Gate	
Swinging gates to allow clear access to deck		Equipped	N/A		Equipped	N/A	
Tailgate operation with tipper control		Auto release from bottom					
VEHICLE DETAILS							
Engine speed @ 100 Km/h		2,230rpm		2,500rpm	2165rpm		2,120rpm
Max theoretical speed		139km/h		124km/h	143km/h		145km/h
Engine Power & Torque (hp & Nm)		150hp / 420Nm			150hp / 420Nm		165hp / 420Nm
Transmission type & number of forward gears		Automatic 6 speed		Manual 5 speed	Automatic 6 speed		Manual 5 speed
Fuel Tank Capacity		80 L			100 L		
Wheels & Tyres		185/85R16			195/85R16		
Seating capacity		3					
DIMENSIONS – (mm)/WEIGHTS – (kg)							
Wheelbase (WB)		2,525			2,810		
Overall length (OL)		4,760			5,115		
Overall width (OW)		1,880			1,995		
Cab width		1,695			1,995		
Overall height (OH)		2,100			2,190		
Front Overhang (FOH)		980			1,115		
Road Clearance (RC)		170			170		
Front Track (FT)		1,400			1,665		
Rear Track (RT)		1,435			1,480		
Turning circle	Kerb to Kerb	9,600			9,800		
	Wall to Wall	10,800			11,200		
Indicative chassis mass–kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)							
Total		2,835	2,795	2,755	3,140	3,100	3,060
Front		1,495	1,520	1,495	1,740	1,765	1,790
Rear		1,340	1,275	1,260	1,400	1,335	1,270
Standard Ratings	GVM	4,495kg			4,495kg		
	GCM	7,995kg			7,995kg		
Optional Ratings	GVM	5,500kg			5,500kg		
	GCM	8,000kg		9,000kg	8,000kg		9,000kg

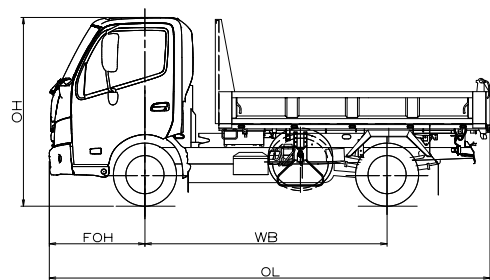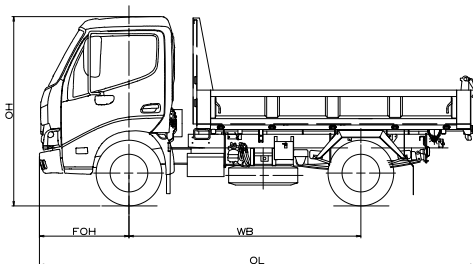

Drawings are for reference only to the dimensions table above.

810 WIDE PER	716 AT 3430 WIDE TIP PRO	717 MT 3430 WIDE TIPPER	717 MT 3430 WIDE TIP PRO	917 MT 3430 WIDE TIP PRO	717 MT 4200 WIDE CREW TIP PRO	816 AT 4200 WIDE CREW TIP PRO	917 MT 4200 WIDE CREW TIP PRO
WKFMTQ3 T	XZU710R-WKTQSQ3 TP	XZU710R-WKFQTQ3 T	XZU710R-WKFQTQ3 TP	XZU710R-WKFTTQ3 TP	XZU730R-ZKFQTQ3 TP	XZU730R-ZKTSSQ3 TP	XZU730R-ZKFTTQ3 TP
		3.0m³			3.2m³		3.4m³
		3,600			3,800		4,000
		2,000			2,000		
		430			430		
3.2				4.5	3.2		4.5
	2.3			3.2	2.3		3.2
2.3				3.2		3.2	
	3.2	2.3		3.2		3.2	
		55°			50°		
		100 x 480			100 x 510		
		VC03-15			VC03-15		
Lever in the cab				Lever in the cab			
	Equipped	N/A		Equipped		Equipped	
	Barn door	Single Gate		Barn door		Barn door	
	Equipped	N/A		Equipped		Equipped	
Auto release from bottom				Auto release from bottom			
3rpm	2,246rpm		2213rpm	2,458rpm	2,213rpm	2,525rpm	2,458rpm
km/h	138km/h		140km/h	126km/h	140km/h	122km/h	126km/h
464Nm	150hp / 420Nm		165hp / 464Nm		165hp / 464Nm	150hp / 420Nm	165hp / 464Nm
6 speed	Automatic 6 speed		Manual 6 speed		Manual 6 speed	Automatic 6 speed	Manual 6 speed
		150 L			100 L		
		215/85R16		225/80R17.5	215/85/R16		225/80R17.5
	3					7	
		3,430			4,200		
		5,870			6,975		7,025
		2,130			2,190		
		1,995			1,995		
		2,230			2,230	2,250	2,260
		1,115			1,115		
		185		200	180		200
		1,665			1,665		
		1,520		1,590	1,520		1,590
		11,400		12,400	13,800		14,800
		12,800		13,800	15,200		16,200
70	3,595	3,520	3,560	3,745	3,815	3,915	4,030
45	1,890	1,890	1,865	1,880	1,995	2,020	1,980
25	1,705	1,630	1,695	1,865	1,820	1,895	2,050
		6,500kg		7,995kg	6,500kg	8,000	7,995
	8,000kg	10,000kg		11,495kg	10,000kg	8,000	11,495
		4,495kg		8,500kg	4,495kg	4,495	8,500
0kg		7,995kg		12,000kg	7,995kg	7,995	12,000

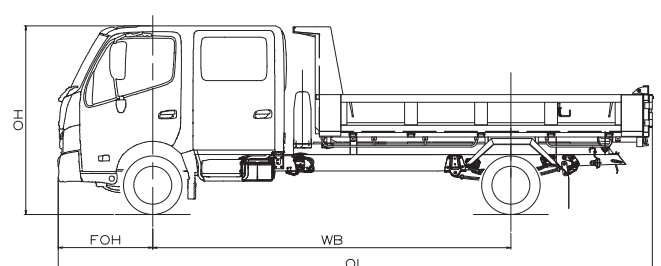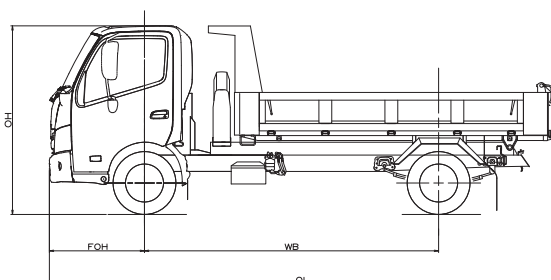

For specific layouts please refer to the applicable body mounting manual. (BMM)

SAFETY FEATURES

Active Safety Features		
Vehicle Stability Control	VSC	Equipped
Anti-lock Brake System	ABS	Equipped
Pre-Collision System	PCS	Equipped
PCS is inclusive of	Autonomous Emergency Braking	AEB
	Pedestrian Detection	PD
Traction Control	TC	Equipped
Lane Departure Warning System	LDWS	Equipped
Reverse Camera	RC	Equipped
ES Start (MT models only)	ES	Equipped
Daytime Running Lamps	DRL	Equipped
Reverse Buzzer		Equipped
Passive Safety Features		
ECE-R29 Cab Strength Certification		Equipped
SRS airbags for driver & side passenger		Equipped
SRS seatbelt pretensioner for driver & side passenger		Equipped
Shock absorbing & collapsible steering column		Equipped
Door Impact Beams		Equipped

TIPPER BODY FEATURES

All steel construction with underbody hoist
Auto release tail gate
Drop sides & tail gate
Body lock, rope rails & barn door (TIP PRO models)

GENUINE ACCESSORY OPTIONS

Bullbar or Nudge bar
Chrome wheel covers
Cameras (up to additional 3 extra)
Dash Camera (DVR Camera System)
Dash mat
Floor mats
GPS navigation with live traffic (Truck spec)
Retracting Tarp
Seat covers (Wool, Canvas, Carbon)
Stone guard
Sunvisor
Weathershields
Please check with your dealer for availability, price & fitment

For Cab Chassis related specifications not included in this document please refer to the applicable Cab Chassis spec sheet or Body mounting Manual

WARRANTY

New vehicle warranty period

Light Duty Model	Axle configuration	Standard warranty (whichever comes first)	Cab corrosion perforation
300 Series	4 x 2	3 years or 100,000km	36 months

Battery warranty – 12 months from date of delivery

Genuine parts or accessories warranty – 3 years unlimited kilometres when fitted by an authorised Hino dealer *

* For conditions, refer to the Hino Parts & Service warranty brochure



DISCLAIMER

Important notice – Hino Trucks are distributed in Australia by Hino Motor Sales Australia Pty Ltd A C N 064 989 724. All efforts have been made to ensure the information contained in this brochure was correct at time of printing or uploading. Hino Motor Sales Australia Pty Ltd reserves the right to alter any details of the specifications and equipment without notice. Hino in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Hino dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features and options are available for the vehicle you are ordering. Please note that some options may only be available in combination with others. Authorised Hino dealers will on request provide up to date information on all accessories, design features, prices & availability.