

8

CHASSIS DRAWINGS


Refer to detail of the cab, chassis and chassis frame drawing based on following table.

Chassis Model	Chassis Drawings			
	Cab		Back	Chassis
	Front	Rear		
FS1ELKA-ERAPEAC	CABF-2	CABR-7	CB-20	CH-28
FS1ELKH-ERAPEAC		CABR-8	CB-21	CH-29

• Front

No. CABF-2

Unit : mm

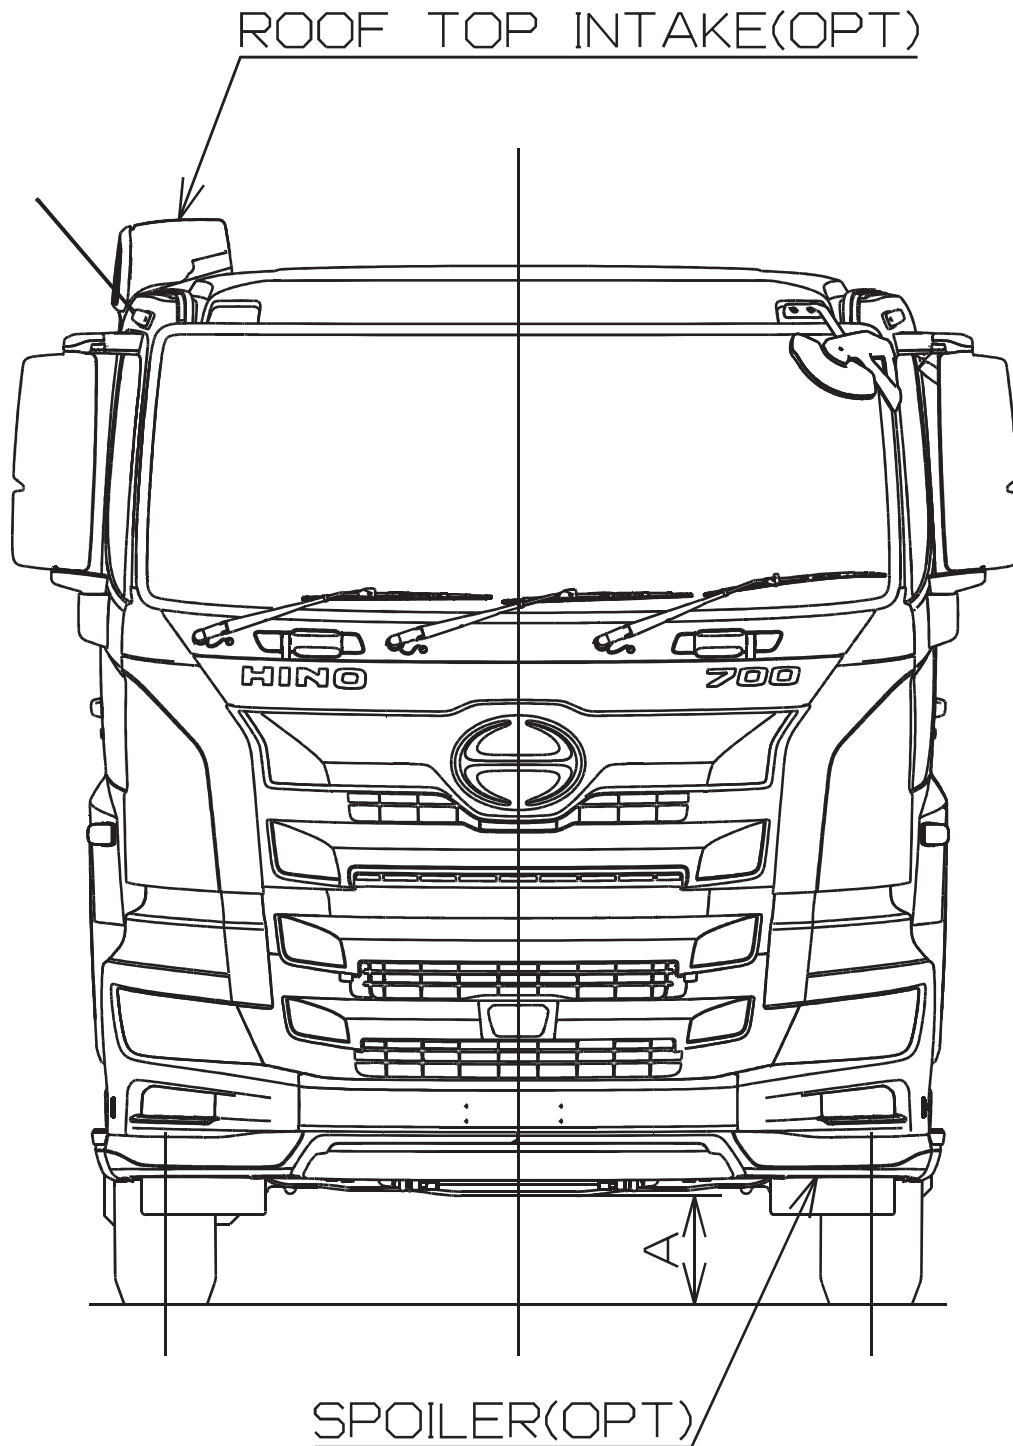


※ Marked "A" to be shown chassis drawing.

• Rear

No. CABR-7

Unit : mm

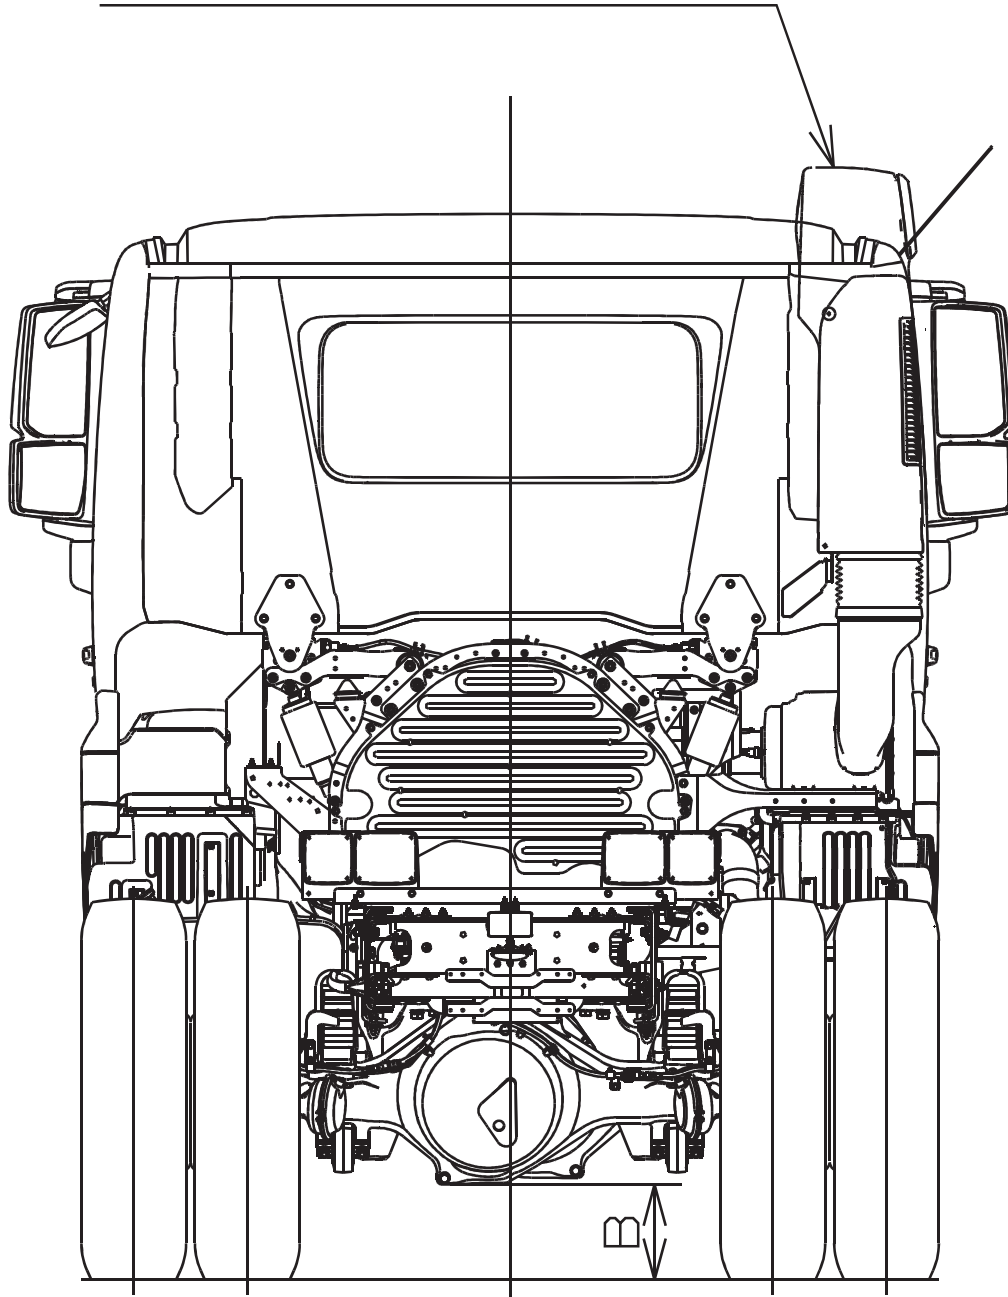
ROOF TOP INTAKE(OPT)

※ Marked "B" to be shown chassis drawing.

• Rear

No. CABR-8

Unit : mm

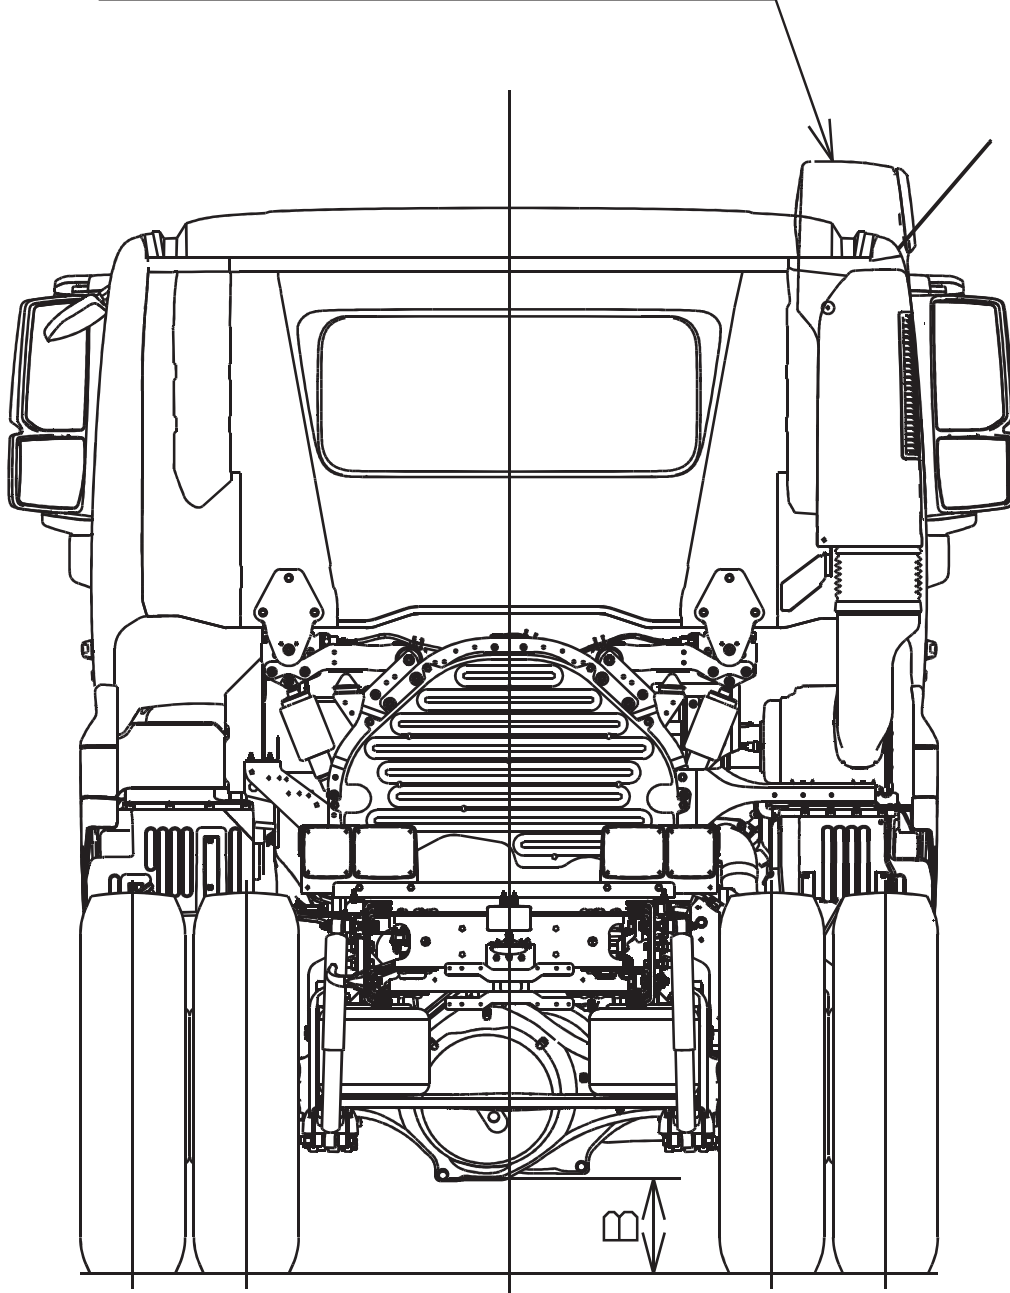
ROOF TOP INTAKE(OPT)

※ Marked "B" to be shown chassis drawing.

No. CB-20

• Left view


Unit : mm

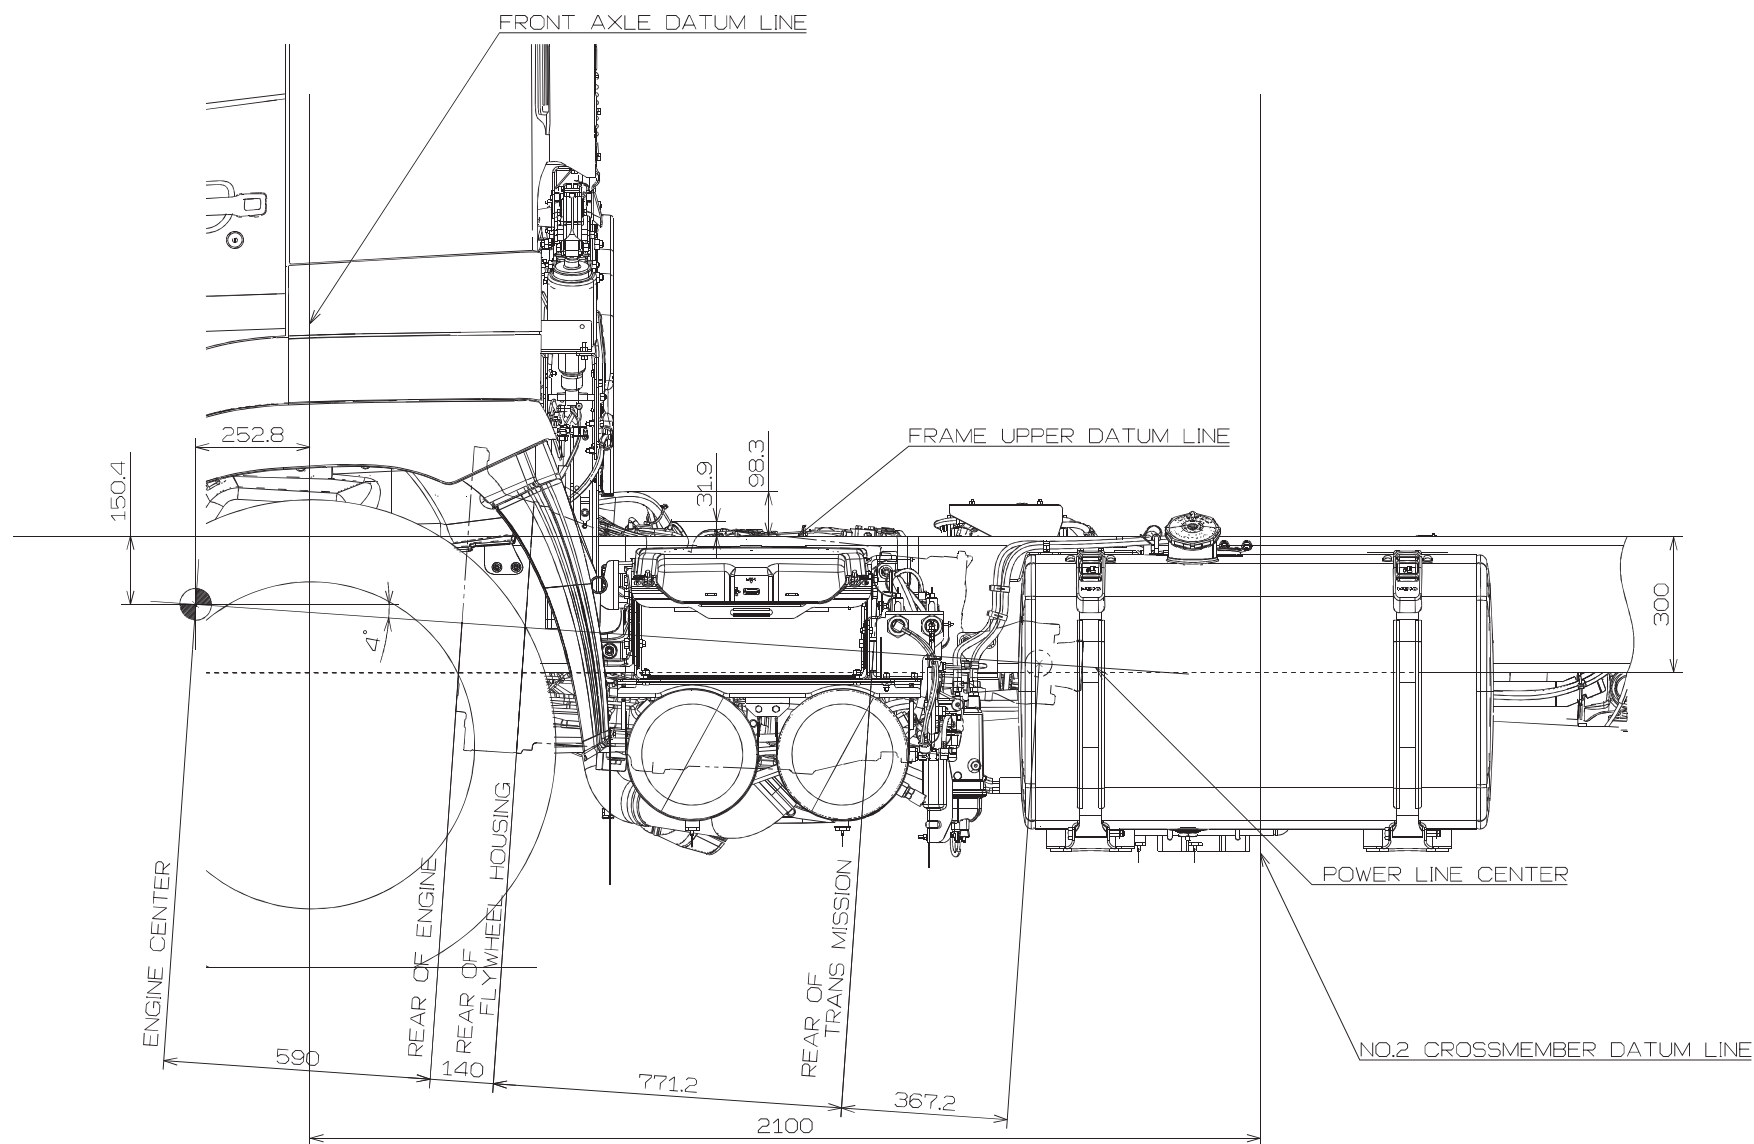

No. CB-20

• Upper view


Unit : mm

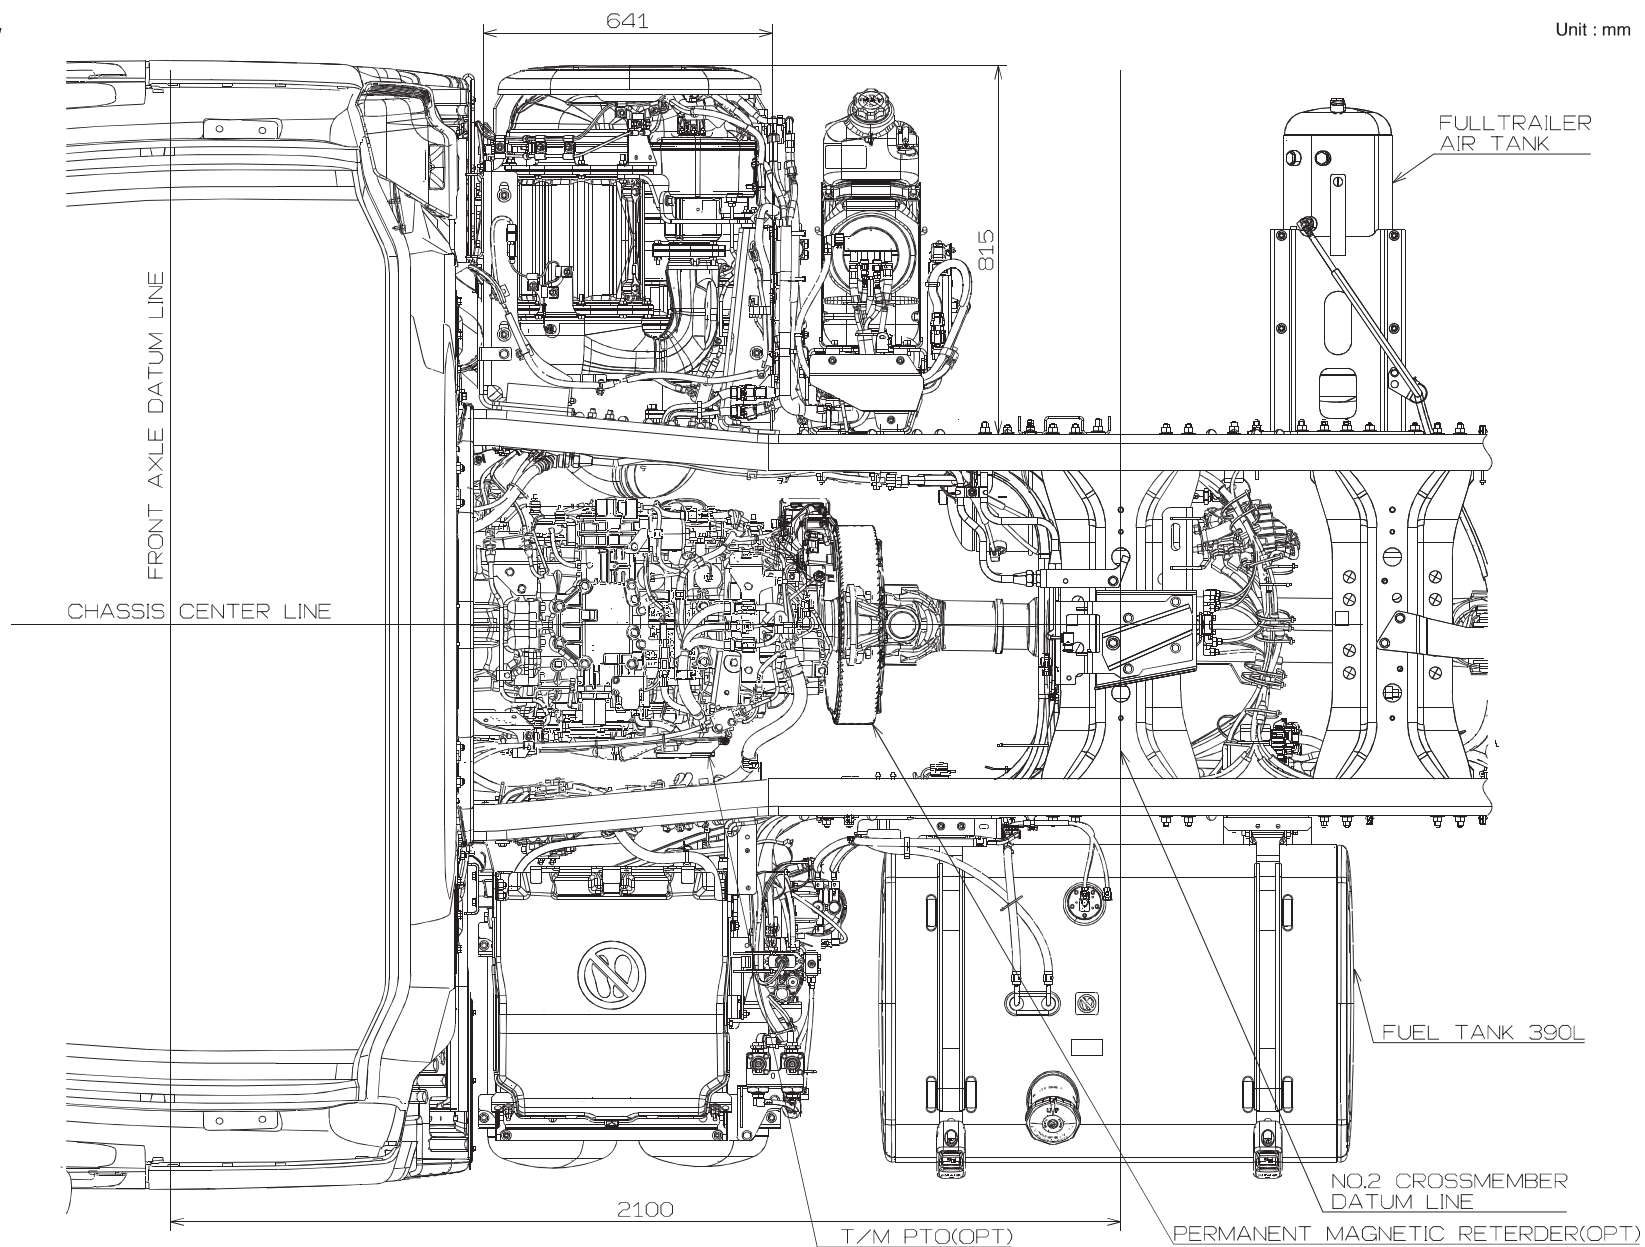

No. CB-20

• Right view


Unit : mm

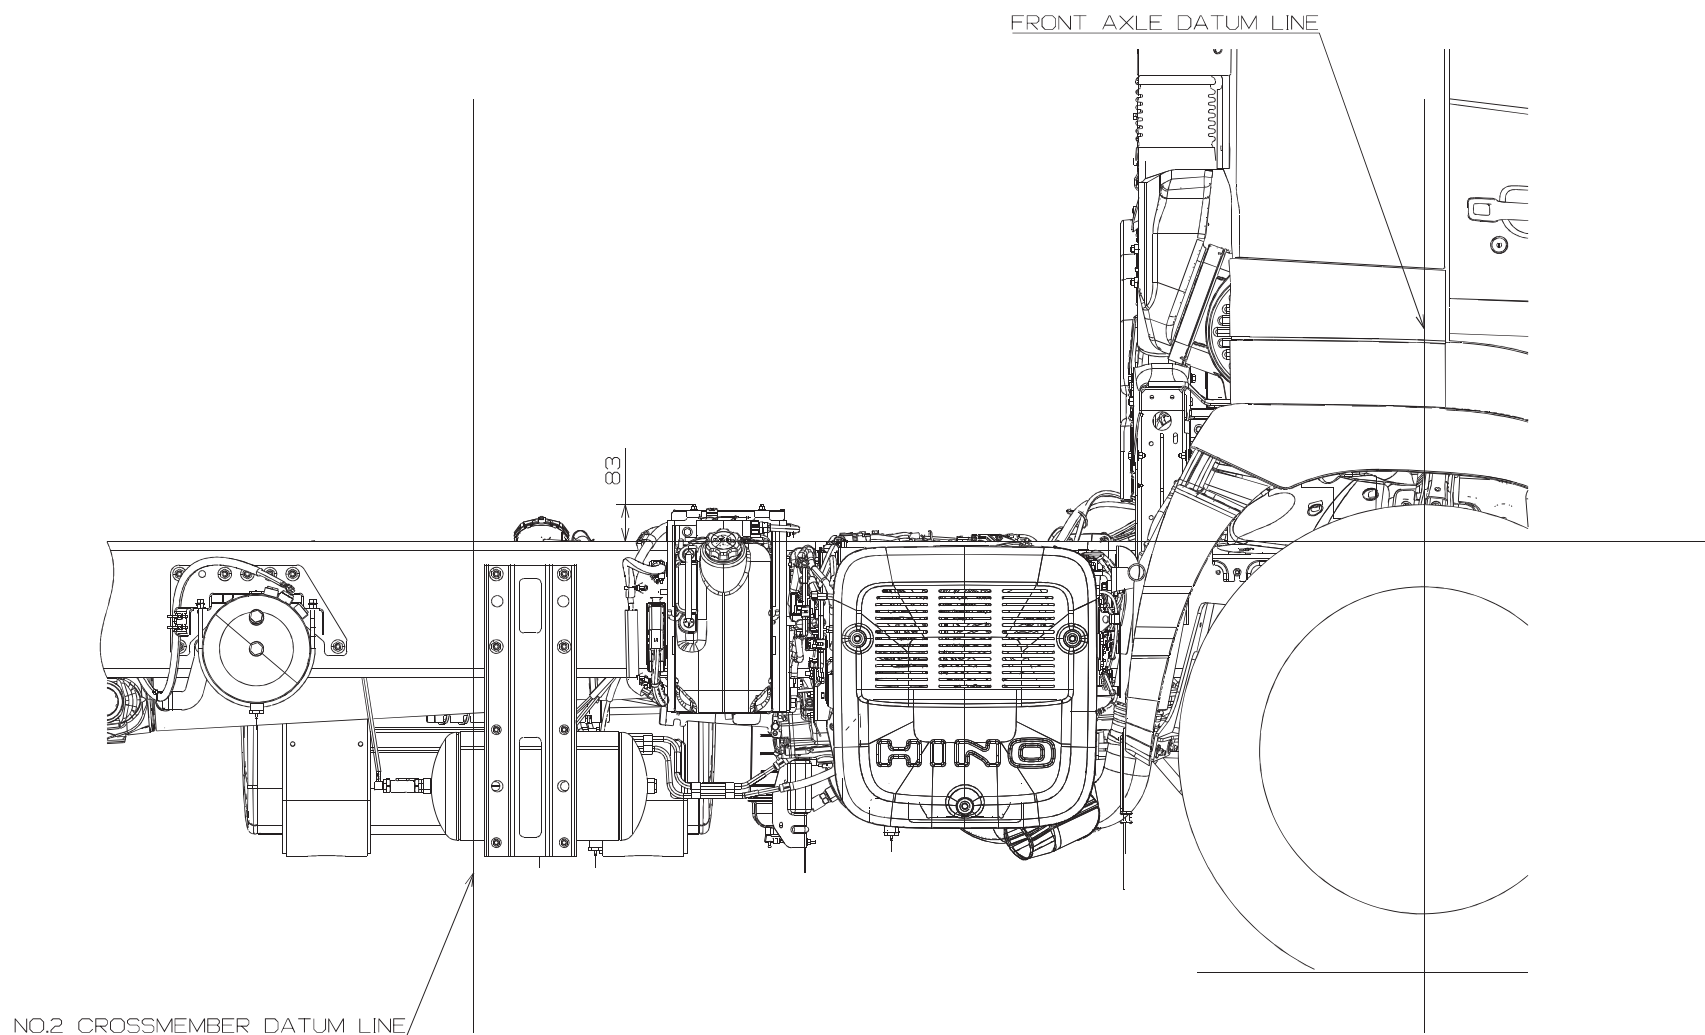

No. CB-21

• Left view


Unit : mm

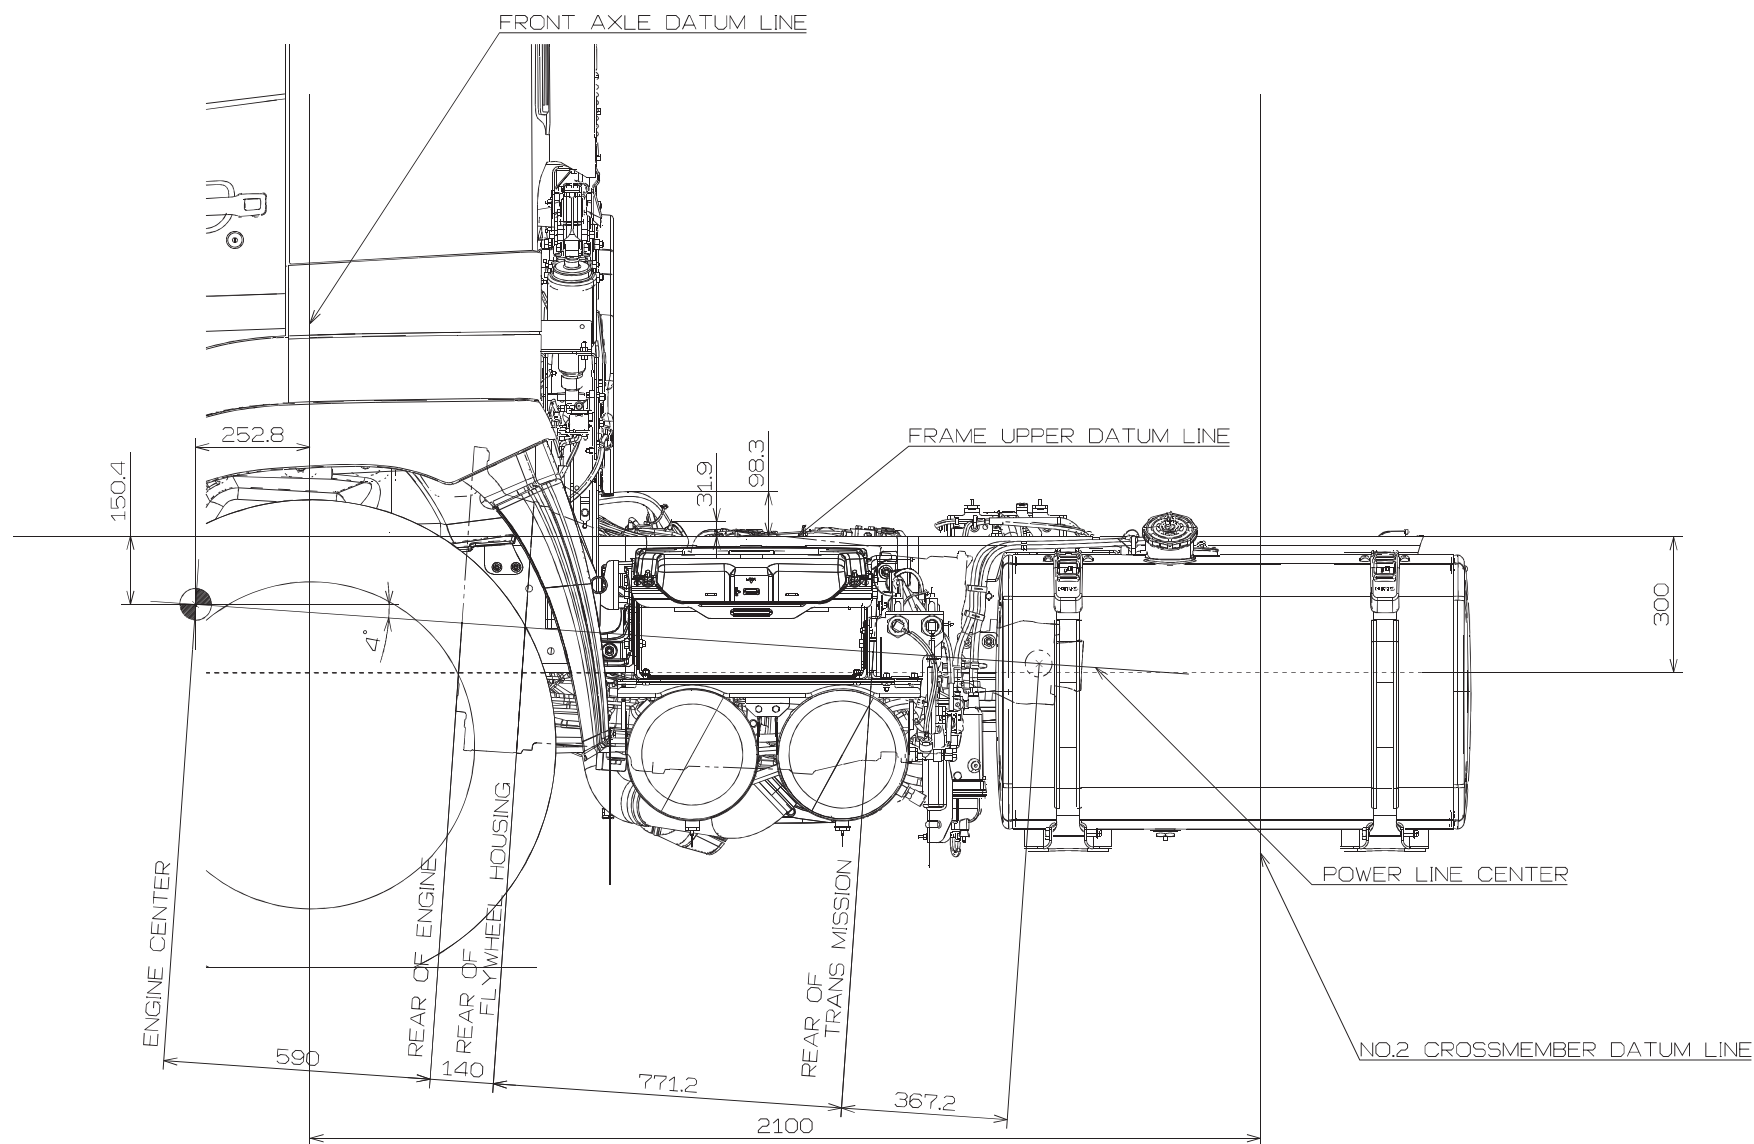

No. CB-21

• Upper view


Unit : mm

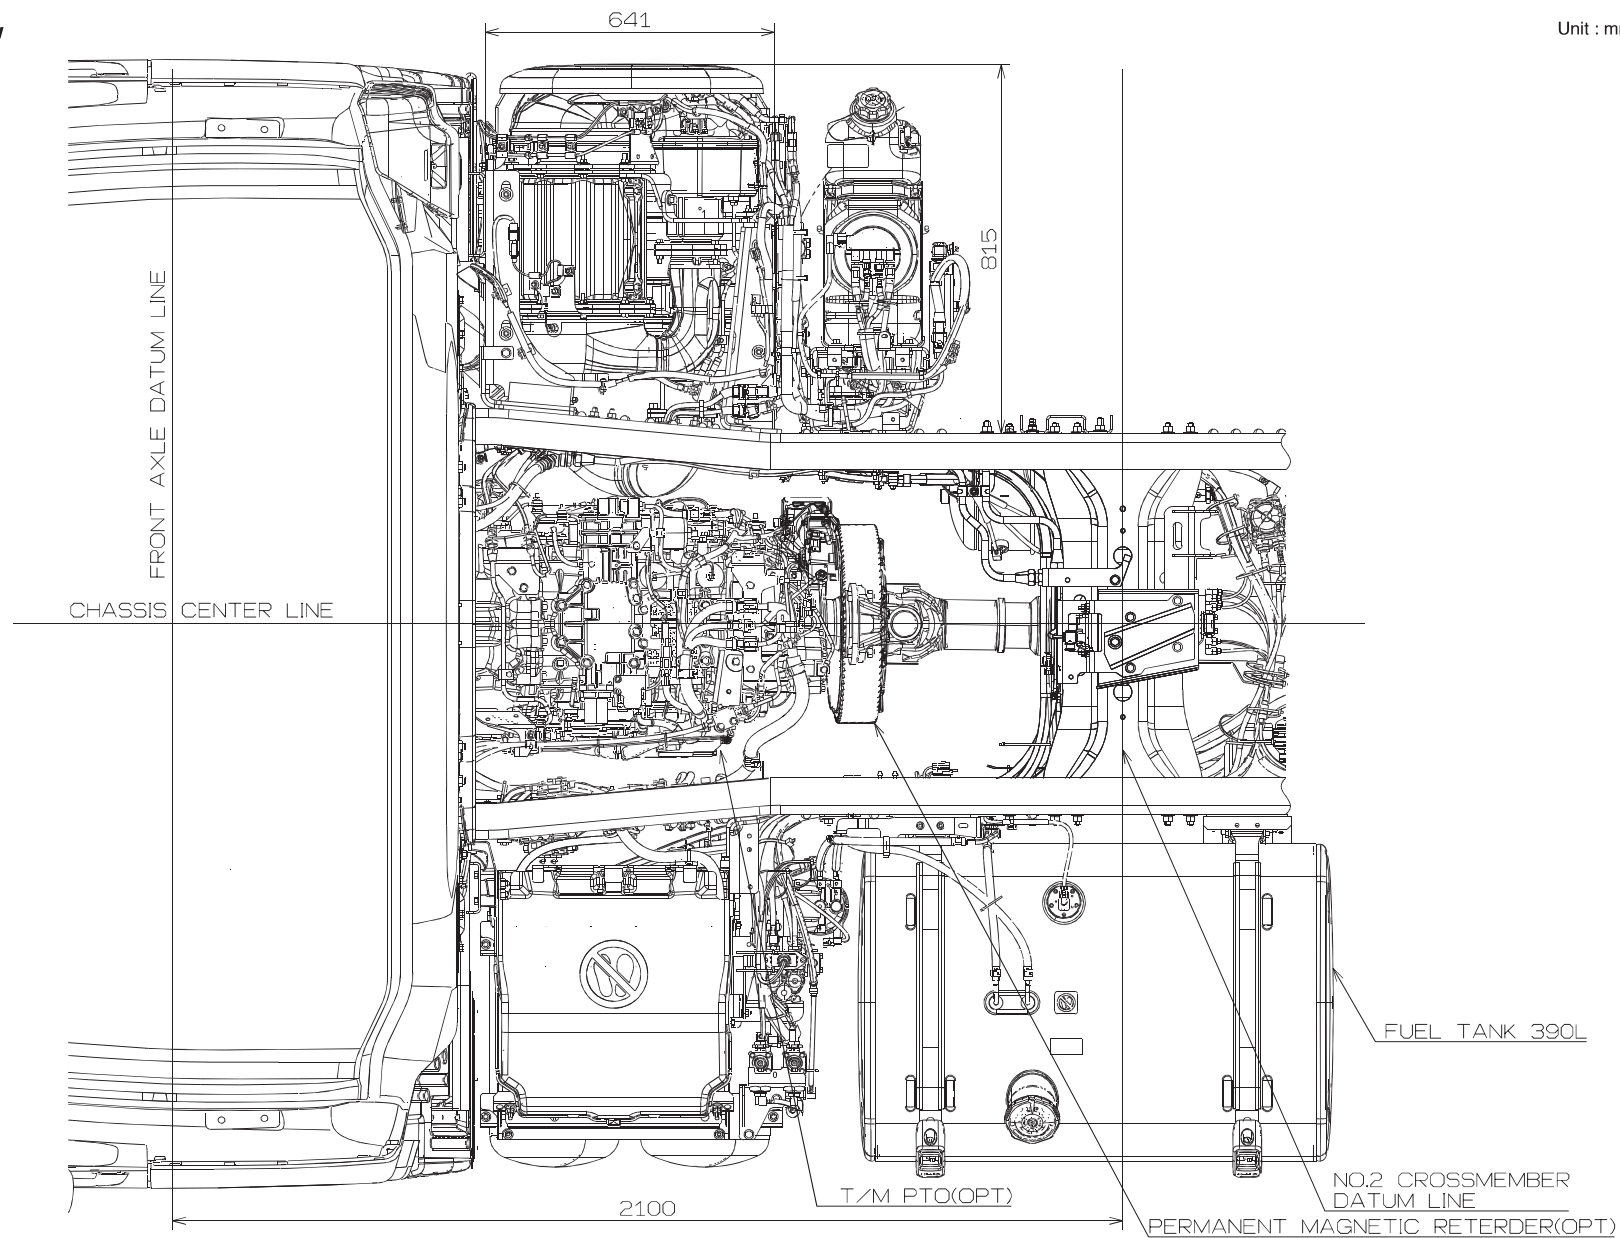

No. CB-21


• Right view

Unit : mm

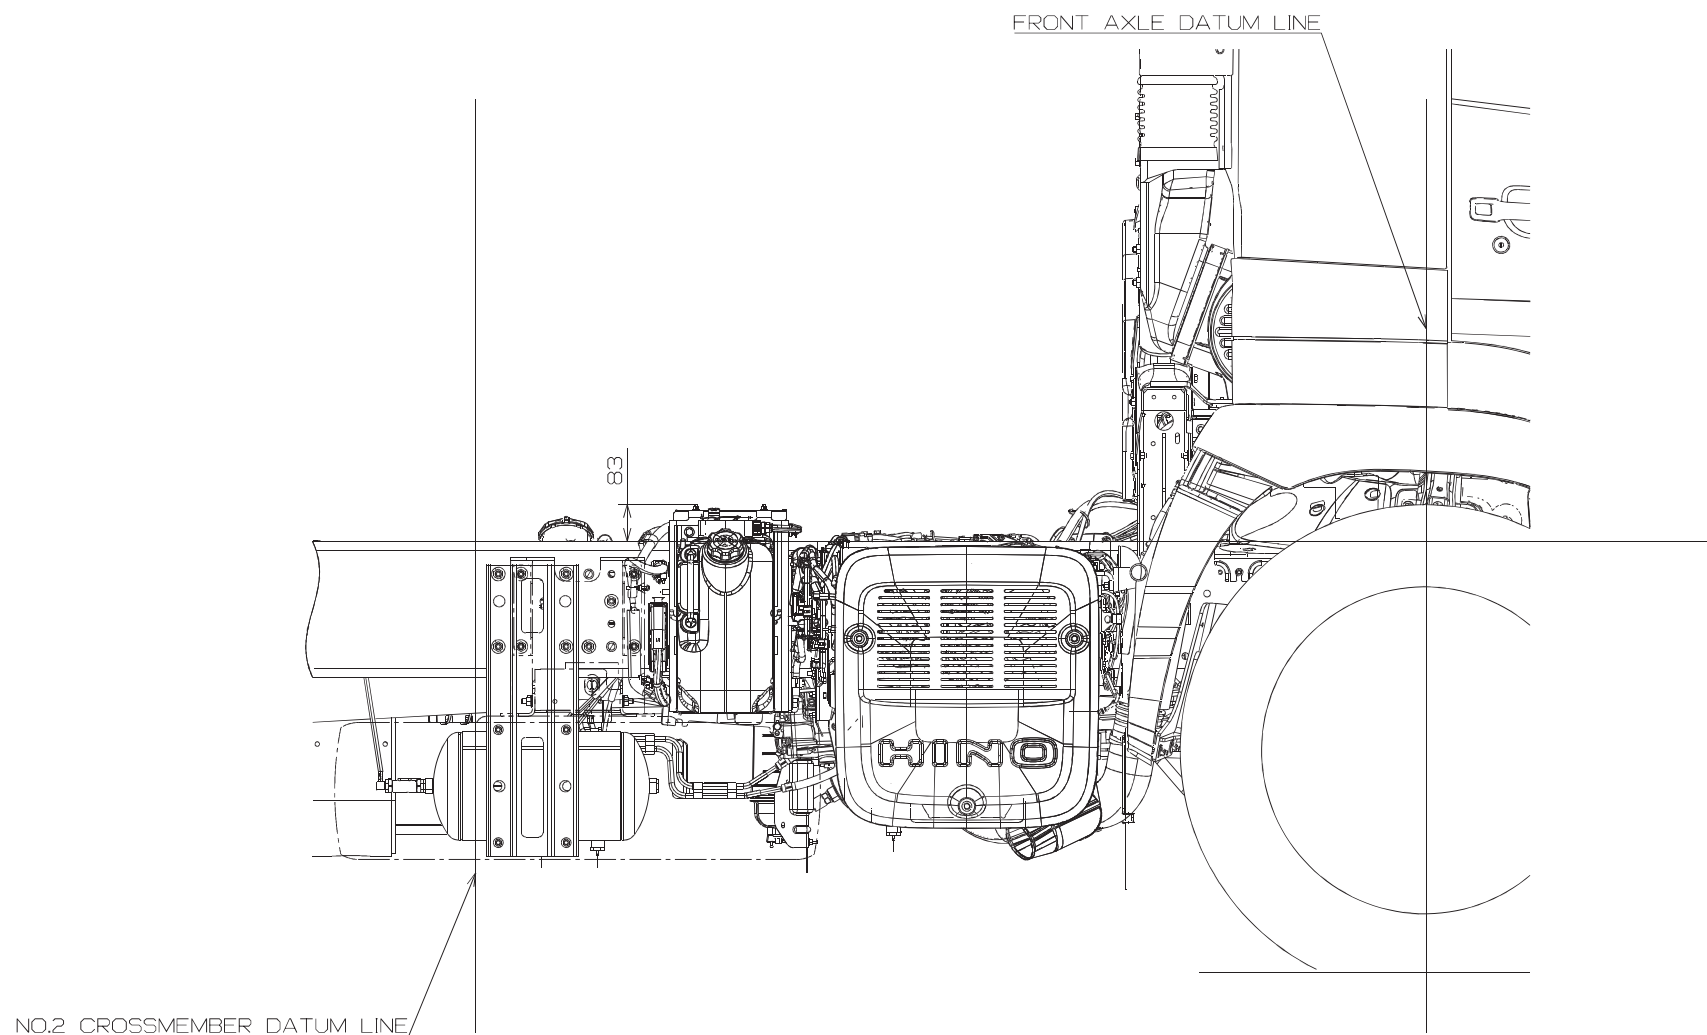

No. CH-28

Unit : mm

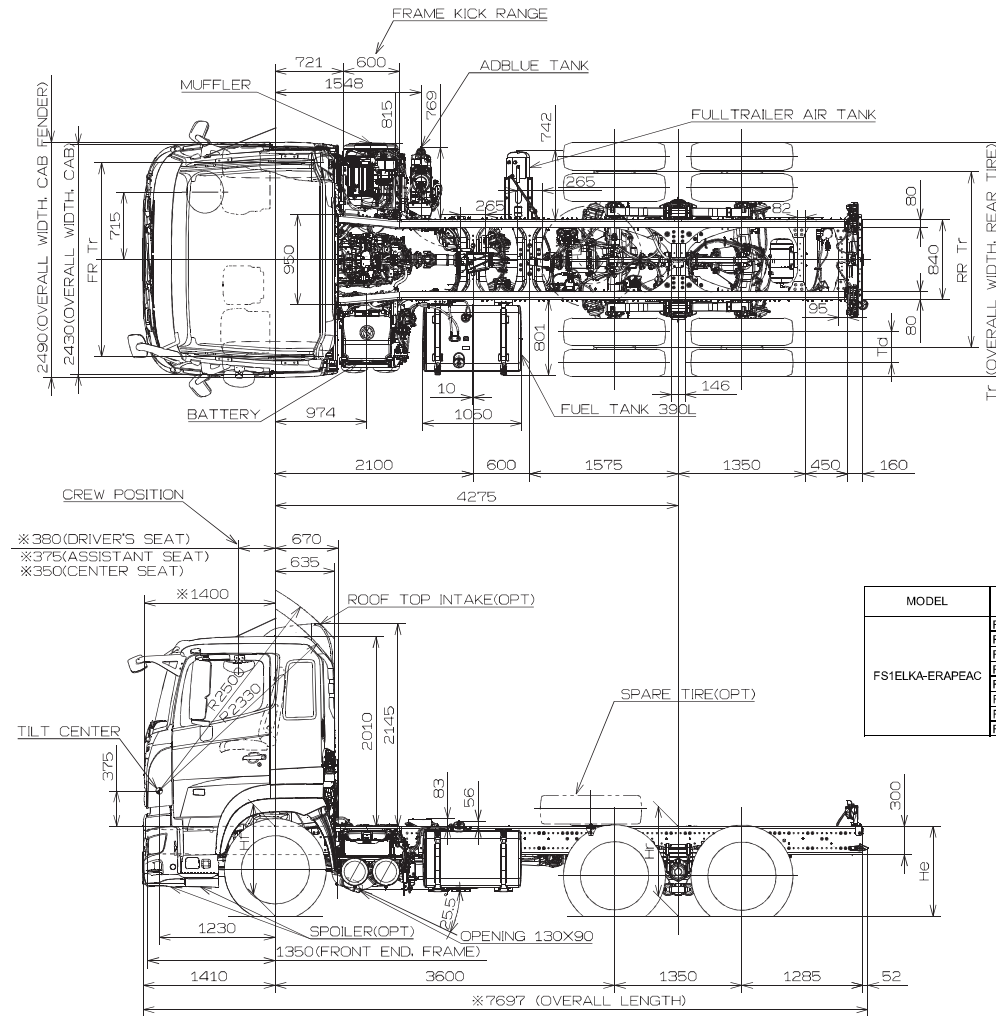


MODEL	TIRE SIZE	DISC SIZE	DIMENSIONS(mm)								
			Hf	Hr	He	A	B	FR Tr	RR Tr	Td	Tr
FS1ELKA-ERAPEAC	F 295/80R22.5, 152/148, R 11R22.5 148/145	22.5X8.25-165 STEEL	1007	1064	1090	265	243	2050	1855	330	2466
	F 295/80R22.5, 152/148, R 11R22.5 148/145	22.5X8.25-165 ALLOY	1007	1064	1090	265	243	2070	1875	330	2482
	F&R 11R22.5 148/145	22.5X8.25-165 STEEL	1007	1064	1089	269	243	2050	1855	330	2466
	F&R 11R22.5 148/145	22.5X8.25-165 ALLOY	1007	1064	1089	269	243	2070	1875	330	2482
	F&R 275/70R22.5 148/145	22.5X8.25-165 STEEL	965	1018	1042	222	197	2050	1855	330	2463
	F&R 275/70R22.5 148/145	22.5X8.25-165 ALLOY	965	1018	1042	222	197	2070	1875	330	2479
	F&R 295/80R22.5 152/148	22.5X8.25-165 STEEL	1007	1060	1085	265	240	2050	1855	330	2477
	F&R 295/80R22.5 152/148	22.5X8.25-165 ALLOY	1007	1060	1085	265	240	2070	1875	330	2493

NOTE:1.Figures marked "*"dimensions are measured in parallel with the surface of the ground.
 2.The dimension of tire to be mentioned in above table shows design figure according to JATMA or ETRTO standard.

No. CH-29

Unit : mm

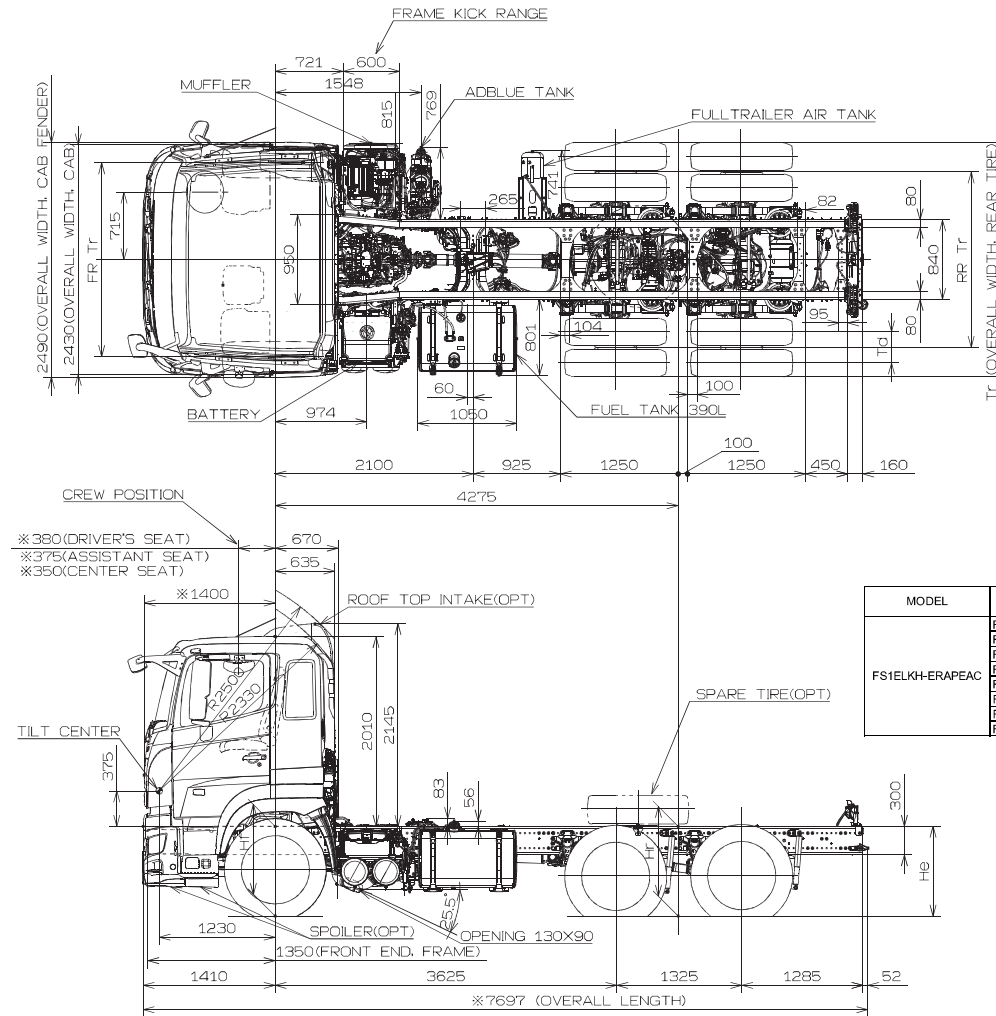

MODEL	TIRE SIZE	DISC SIZE	DIMENSIONS(mm)								
			Hf	Hr	He	A	B	FR Tr	RR Tr	Td	Tr
FS1ELKH-ERAPEAC	F 295/80R22.5, 152/148, R 11R22.5 148/145	22.5X8.25-16S STEEL	1008	1055	1077	265	242	2050	1855	330	2466
	F 295/80R22.5, 152/148, R 11R22.5 148/145	22.5X8.25-16S ALLOY	1008	1055	1077	265	242	2070	1875	330	2482
	F&R 11R22.5 148/145	22.5X8.25-16S STEEL	1008	1055	1076	269	242	2050	1855	330	2466
	F&R 11R22.5 148/145	22.5X8.25-16S ALLOY	1008	1055	1076	269	242	2070	1875	330	2482
	F&R 275/70R22.5 148/145	22.5X8.25-16S STEEL	966	1009	1029	222	196	2050	1855	330	2463
	F&R 275/70R22.5 148/145	22.5X8.25-16S ALLOY	966	1009	1029	222	196	2070	1875	330	2479
	F&R 295/80R22.5 152/148	22.5X8.25-16S STEEL	1008	1052	1072	265	239	2050	1855	330	2477
	F&R 295/80R22.5 152/148	22.5X8.25-16S ALLOY	1008	1052	1072	265	239	2070	1875	330	2493

NOTE:1.Figures marked "*"dimensions are measured in parallel with the surface of the ground.
 2.The dimension of tire to be mentioned in above table shows design figure according to JATMA or ETRTO standard.